


WIRING DIAGRAM OF CLASSIC WITH SELF STARTER

12 V 70 W ELECTRONIC WITH IGNITION LOCK, AC INDICATOR, 'T' NOSE TYPE FOR CLASSIC WITH SELF START

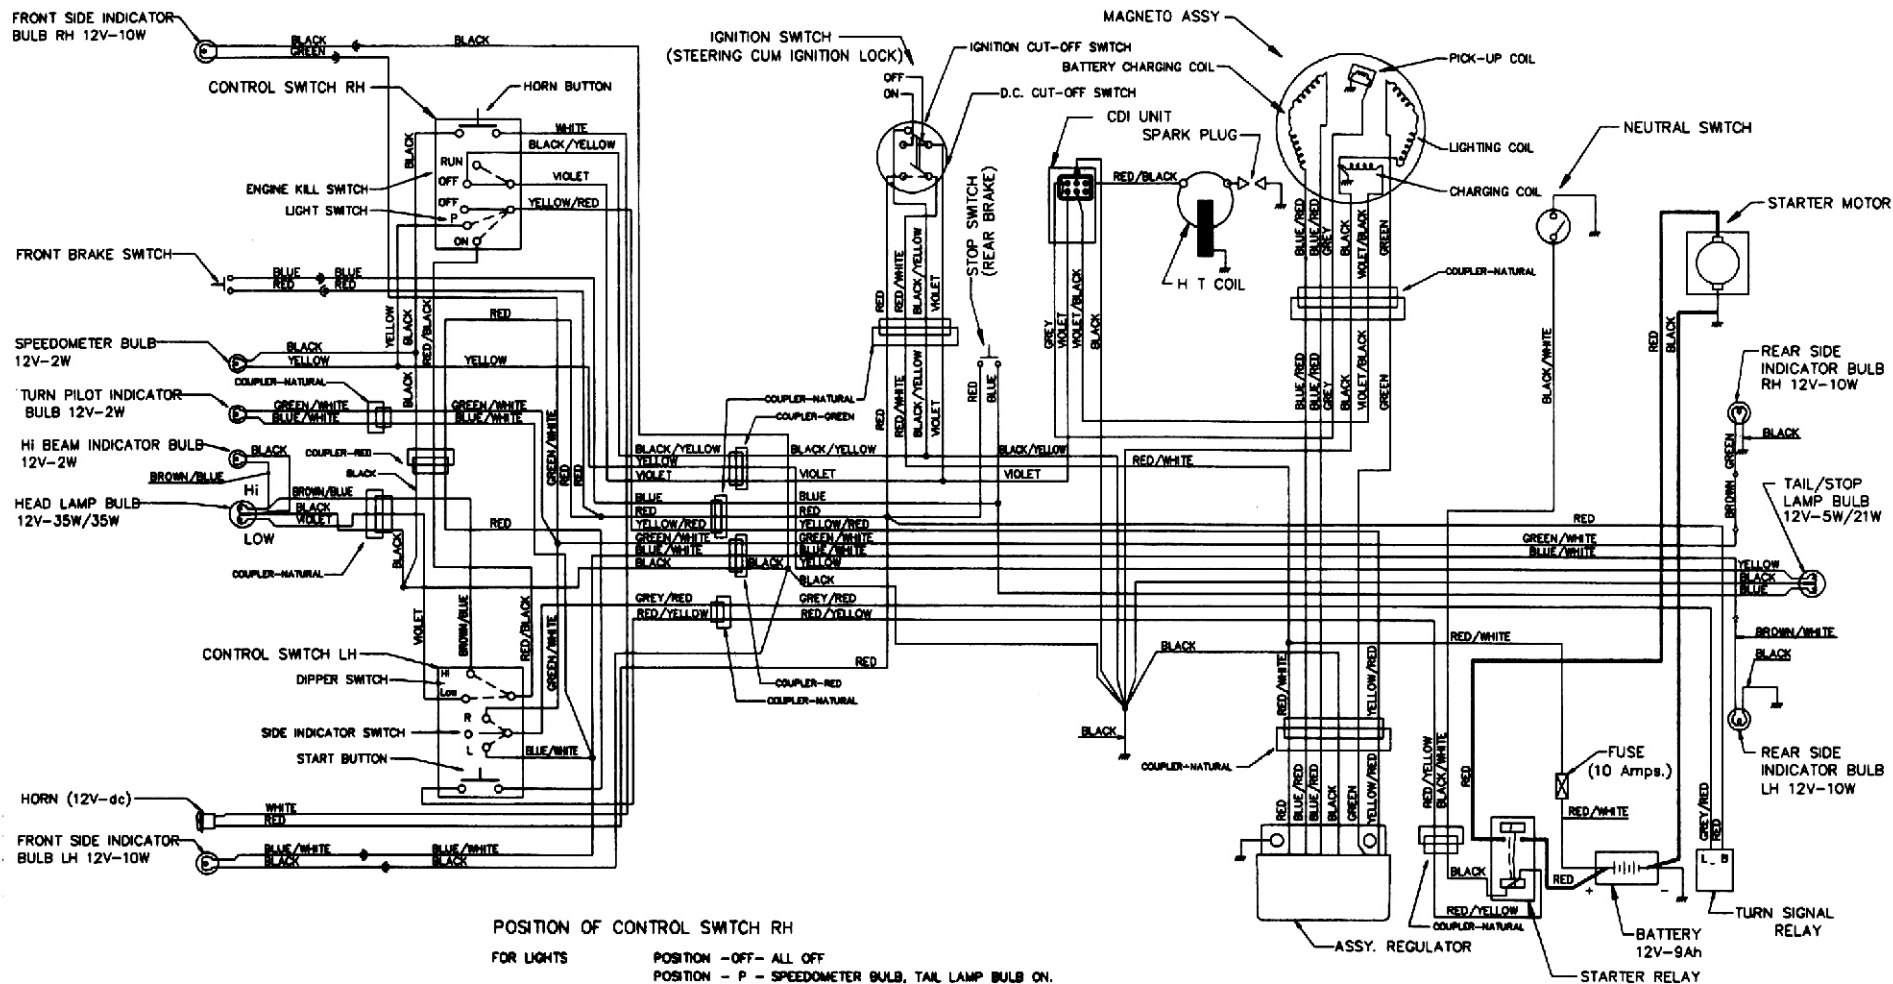

- POSITION OF CONTROL SWITCH RH**
- FOR LIGHTS
 - POSITION -OFF- ALL OFF
 - POSITION - P - SPEEDOMETER BULB, TAIL LAMP BULB ON.
 - POSITION -ON- SPEEDOMETER BULB, TAIL LAMP BULB, HEAD LAMP ON
 - FOR ENGINE STOP
 - POSITION -RUN- ENGINE RUN POSITION, TERMINALS FOR ENGINE RUN DISCONNECTED
 - POSITION -OFF- ENGINE STOP POSITION, TERMINALS FOR ENGINE STOP CONNECTED.
 - FOR HORN
 - PRESS THE BUTTON, TERMINALS FOR HORN CONNECTED
- POSITION OF CONTROL SWITCH LH**
- FOR SIDE INDICATOR
 - POSITION (O) INDICATORS OFF
 - POSITION (L) LEFT SIDE INDICATORS AND TURN PILOT INDICATOR BULB ON
 - POSITION (R) RIGHT SIDE INDICATORS AND TURN PILOT INDICATOR BULB ON
 - FOR HI/ LOW BEAM
 - POSITION (H) HEAD LAMP MAIN BEAM ON AND HI BEAM INDICATOR ON.
 - POSITION (DN) HEAD LAMP DIP BEAM ON.
 - FOR START BUTTON
 - PRESS THE BUTTON, TERMINALS FOR START BUTTON CONNECTED.